




0360

ZAPFENSCHNEIDER TENON PLUG CUTTER MÈCHES À BOUCHONNER

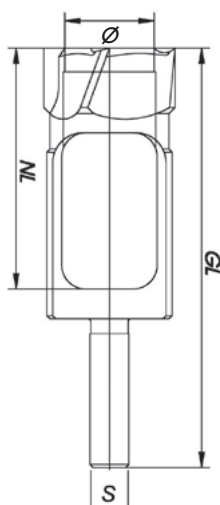

DE Ausführung: DIN 7489, mehrschneidig, mit Peripherieschneide und zylindrischem Schaft. Wir fertigen auch Speziallängen für Bohrproben. HS- und HW-Ausführung sowie Spezialschäfte wie MK und Innengewinde auf Anfrage. Bis Drm. 32 mm: Schaft 13x50mm. Ab Drm. 33mm: Schaft 16x50mm.

Verwendung: Zum Bohren von sehr langen Ausflückdübel. Die Zapfenschneider werden mit leichtem Übermaß gefertigt, damit die Ausflückdübel einwandfrei sitzen. In Verwendung mit Forstnerbohrer und Kunstbohrer.

EN Characteristics: DIN 7489, peripheral cutter, multi-cutting, cylindrical shank. Available in special steel. On request in HS and TCT, with special lengths for specimen and shanks like morse cone and inner thread. Up to 32mm: Shank 13x50mm. From 33mm: Shank 16x50mm.

Usage: For improving knot-holes, making tenons, or special length plugs. The tenon cutters have an excess of 0,1 mm to permit the exact seating of the knot-hole dowels.

FR Caractéristiques : Selon la norme DIN 7489. En acier, à couteaux multiples et queue cylindrique.

Utilisation : Permet la réalisation de bouchons de haute qualité. En combinaison avec la mèche à façonner, elle permet d'éliminer les imperfections du bois (nœuds) et de réaliser des caches (crous, vis...). Important : à utiliser impérativement avec nos mèches à façonner et sur une perceuse fixe (à colonne).

Ø	Z	NL	GL	S	EAN	ART.NR.
6	4	80	140	13	9002696094975	036000600
8	4	80	140	13	9002696011064	036000800
10	4	80	140	13	9002696011095	036001000
12	4	80	140	13	9002696011132	036001200
13	4	80	140	13	9002696011163	036001300
14	4	80	140	13	9002696011170	036001400
15	4	80	140	13	9002696011194	036001500
16	4	80	140	13	9002696011217	036001600
18	4	80	140	13	9002696011231	036001800
20	4	80	140	13	9002696011255	036002000
22	5	80	140	13	9002696011262	036002200
25	5	80	140	13	9002696011279	036002500
30	5	80	140	13	9002696011293	036003000
32	5	80	140	13	9002696095033	036003200
35	5	100	160	16	9002696011309	036003500
40	6	100	160	16	9002696011323	036004000
45	6	100	160	16	9002696011330	036004500
50	6	100	160	16	9002696011347	036005000
55	6	100	160	16	9002696011354	036005500
60	8	100	160	16	9002696011361	036006000
65	8	100	160	16	9002696011378	036006500
70	8	100	160	16	9002696011385	036007000
80	10	100	160	16	9002696048343	036008000

DREHZAHLTABELLE / RPM TABLE / TABLE DES VITESSES DE ROTATION

U/MIN RPM T/MN	WEICHHOLZ SOFT WOOD BOIS TENDRE	HARTHOLZ HARD WOOD BOIS DUR
< Ø 16 mm	1000	500
> Ø 16 mm	500	300

DREHZAHLTABELLE / RPM TABLE / TABLE DES VITESSES DE ROTATION

U/MIN RPM T/MN	WEICHHOLZ SOFT WOOD BOIS TENDRE	HARTHOLZ HARD WOOD BOIS DUR
< Ø 5/8"	1000	500
> Ø 1-5/8"	500	300

Ø	Z	NL	GL	S	EAN	ART.NR.
3/8"	4	3 3/16"	5 1/2"	1/2"	9002696011033	036000952
1/2"	4	3 3/16"	5 1/2"	1/2"	9002696011019	036001270
5/8"	4	3 3/16"	5 1/2"	1/2"	9002696011040	036001588
3/4"	4	3 3/16"	5 1/2"	1/2"	9002696011026	036001905
7/8"	5	3 3/16"	5 1/2"	1/2"	9002696011057	036002223
1"	5	3 3/16"	5 1/2"	1/2"	9002696011088	036002540
1 1/4"	5	3 3/16"	5 1/2"	1/2"	9002696011118	036003175
1 3/8"	5	3 15/16"	6 5/16"	1/2"	9002696011156	036003493
1 1/2"	5	3 15/16"	6 5/16"	1/2"	9002696011101	036003810
1 5/8"	6	3 15/16"	6 5/16"	1/2"	9002696011187	036004128
1 3/4"	6	3 15/16"	6 5/16"	1/2"	9002696011149	036004445
2"	6	3 15/16"	6 5/16"	1/2"	9002696011248	036005080